



Automotive Industry

MBR Waste Water Treatment

Project Details:

Description	Details
Location	Ahmedabad
Product	Submerged MBR Membrane
Capacity	20.00 M3/day
Membrane Area	70 M2
Model No.	HMBR 10-07
No Module	1

Challenge of Project:

The Automotive industry had following challenges in waste water plant :

1. To be Reused in Truck washing, floor washing and flushing.
2. The space available was limited.
3. The system had to be very efficient to deliver parameters as per PCB Norms in spite of the high level input parameters.


Project Overview:

Water treatment company was given contract to design a wastewater treatment system for a large Automotive component manufacturer in Sanand, Gujarat. The 500 employees of factory generated common wastewater stream containing high levels of organic matter.

Benefits to client:

- Small Footprint
- Robust
- Compact
- Fully Automatic
- High purity water
- Achieve PCB Norms
- Consistent Quality
- Easy operation
- Common blower for aeration & MBR Tank
- High efficient plant

Imemflo Solution:

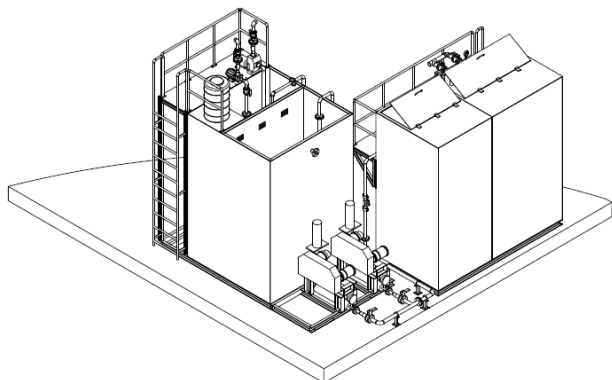

We would like to mention case here that the Automotive industry of Sanand, Gujarat demanded for "A" Class treated Water Quality from sewage treatment plant to reuse in Truck washing, floor washing and toilet flushing. We discussed and advised them to go with our special membranes developed for such application. Imemflo Hollow Fiber membrane is made of PVDF, which has better chemical stability, fouling resistance and mechanical strength. With advanced membrane fabrication technology, imemflo the membrane pore size around $0.25\ \mu$ to get a higher water flux and water quality. Imemflo Hollow fiber MBR element has a bi-directional suction configuration to enhance filtration performances.

Process Summary:

The process is very simple compact as because of the less space and high EFFICIENCY with simple management of the plant, as a result of high degree of automation (low dependence on human factor). Also constant effluent quality, regardless of the influent is the best part of the technology provided by us. The waste water is initially collected and its O&G is removed then primary treatment is done for the suspended solids removal. Aeration tank is provided for maintaining the dissolved oxygen content and then MBR unit is provided for the removal of the impurities.

Description	Typical municipal wastewater		
	Input water	Output water	
TURBIDITY (NTU)	--	Membrane filtration process	0.5
SDI	--		3
TSS (mg/L)	100-300		4
BOD ₅ (mg/L)	300		4
COD (mg/L)	600	Biological process	20
NH ₃ -N (mg/L)	30		0.5
TN (mg/L)	40		14
TP (mg/L)	10-20		0.5

About Imemflo:

Imemflo, a German developed product always focuses on membrane research and development to meet customers strict filtration needs and is available in flat sheet [FS- MBR] and hollow fibre module type [HF- MBR].



→ Scan QR-code here and visit our Website



Web: www.imemflo.com
E mail : info@imemflo.com